




## Sailfish 241 CC - Performance Bulletin

**Motor:** Single Yamaha F200XCA

PERFORMANCE			
RPM	MPH	GPH	MPG
1000	4.5	0.7	6.92
1500	6.3	1.2	5.25
2000	7.9	2.1	3.83
2500	8.6	3.4	2.53
3000	10.9	4.8	2.29
3500	18.1	6.3	2.87
4000	25.4	7.7	3.3
4500	30.5	9.6	3.19
5000	34.7	14.2	2.45
5500	39.3	17.6	2.23
5900	41.1	19.6	2.10
ACCELERATION			
0-30MPH - 11.83 Sec.			
TEST CONDITIONS			
NUMBER OF PEOPLE			3
AIR TEMP (Fahrenheit)			80° F/74° F
ELEVATION (IN FEET ABOVE SEA LEVEL)			174'
WIND VELOCITY			5 ~ 10 MPH

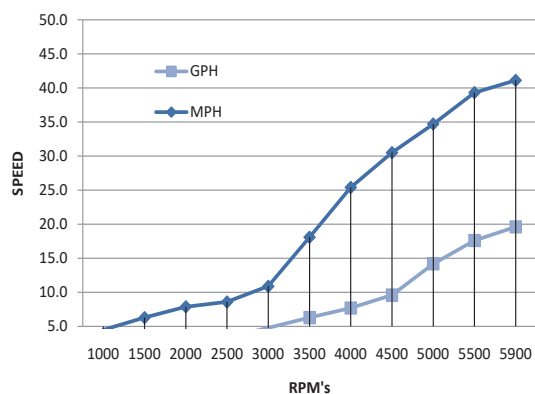

MANUFACTURER INFO	
NAME:	Sailfish Boats
STREET:	PO Box 1899
CITY, STATE, ZIP:	Cairo, GA 39828
PHONE:	229-377-2125
FAX:	229-377-1855
WEBSITE:	www.sailfishboats.com
BOAT DETAILS	
BOAT MODEL	241CC
LENGTH	24'
BEAM	8' 6"
APPROX WET WEIGHT	5400 lbs
MAXIMUM HP	300 Hp
FUEL CAPACITY	110 Gal
ENGINE DETAILS	
ENGINE MODEL/S	F200XCA
HORSEPOWER	200 HP
INDUCTION	EFI/VCT/DOHC
DISPLACEMENT	2.8 L
WEIGHT	489 lbs
GEAR RATIO	1.86:1
ENGINE MOUNTING HEIGHT	
MOUNTING HOLE POSITION	#3
PROPELLER/S	
SERIES	Reliance / SDS HUB
DIAMETER/PITCH	14 1/2 x 15
YAMAHA PART # (sgl)	68F-45970-10-00
PROPELLER MATERIAL	POLISHED STAINLESS STEEL
COMMENTS	
BOAT EQUIPPED WITH TWO BATTERIES, T-TOP, FULL TANK OF FUEL, THREE PERSONS, MISC. SAFETY AND TEST GEAR (APPROX 180 LBS)	

**Notice to Consumer:** The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Seminole Marine Inc. reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice.

FISHING FOCUSED. FAMILY FRIENDLY.™


Seminole Marine Group | sailfishboats.com



## Sailfish 241 CC - Performance Bulletin

**Motor:** Single Yamaha F250XCA

PERFORMANCE			
RPM	MPH	GPH	MPG
1000	5.0	1.2	4.17
1500	6.2	1.8	3.42
2000	8.3	3.3	2.50
2500	9.1	5.2	1.77
3000	10.9	6.7	1.62
3500	13.9	9.1	1.53
4000	29.2	11.5	2.6
4500	34.1	14.1	2.43
5000	38.2	19.0	2.01
5500	41.7	23.1	1.81
6000	45.5	25.1	1.81
ACCELERATION			
0-30MPH - 9.50 Sec.			
TEST CONDITIONS			
NUMBER OF PEOPLE			3
AIR TEMP (Fahrenheit)			80° F/74° F
ELEVATION (IN FEET ABOVE SEA LEVEL)			174'
WIND VELOCITY			5 ~ 10 MPH

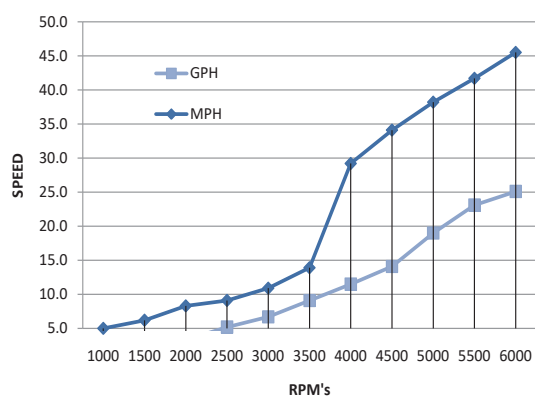

**Notice to Consumer:** The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Seminole Marine Inc. reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice.

MANUFACTURER INFO	
NAME:	Sailfish Boats
STREET:	PO Box 1899
CITY, STATE, ZIP:	Cairo, GA 39828
PHONE:	229-377-2125
FAX:	229-377-1855
WEBSITE:	www.sailfishboats.com
BOAT DETAILS	
BOAT MODEL	241CC
LENGTH	24'
BEAM	8' 6"
APPROX WET WEIGHT	5400 lbs
MAXIMUM HP	300 Hp
FUEL CAPACITY	110 Gal
ENGINE DETAILS	
ENGINE MODEL/S	F250XCA
HORSEPOWER	250 HP
INDUCTION	EFI/VCT/DOHC
DISPLACEMENT	4.2 L
WEIGHT	562 lbs
GEAR RATIO	1.75:1
ENGINE MOUNTING HEIGHT	
MOUNTING HOLE POSITION	#3
PROPELLER/S	
SERIES	SALTWATER SERIES II / SDS HUB
DIAMETER/PITCH	15 3/4 x 15
YAMAHA PART # (sgl)	6CE-45976-00-00
PROPELLER MATERIAL	POLISHED STAINLESS STEEL
COMMENTS	
BOAT EQUIPPED WITH TWO BATTERIES, T-TOP, FULL TANK OF FUEL, THREE PERSONS, MISC. SAFETY AND TEST GEAR (APPROX 180 LBS)	

FISHING FOCUSED. FAMILY FRIENDLY.™


Seminole Marine Group | sailfishboats.com



## Sailfish 241 CC - Performance Bulletin

**Motor:** Single Yamaha F300XCA

PERFORMANCE			
RPM	MPH	GPH	MPG
1000	5.1	1.2	4.25
1500	7.2	2.1	3.43
2000	8.4	3.5	2.39
2500	9.5	5.5	1.72
3000	13.1	7.6	1.72
3500	27.6	8.8	3.1
4000	32.9	12.0	2.75
4500	37.9	16.1	2.36
5000	41.5	19.9	2.08
5500	46.5	26.0	1.79
5900	49.0	26.1	1.88
ACCELERATION			
0-30MPH - 8.75 Sec.			
TEST CONDITIONS			
NUMBER OF PEOPLE			3
AIR TEMP (Fahrenheit)			80° F/74° F
ELEVATION (IN FEET ABOVE SEA LEVEL)			174'
WIND VELOCITY			5 ~ 10 MPH

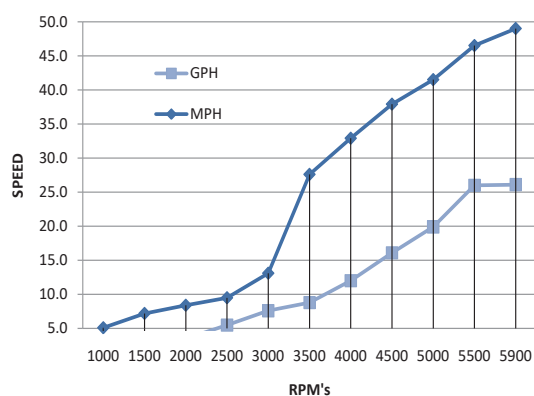

MANUFACTURER INFO	
NAME:	Sailfish Boats
STREET:	PO Box 1899
CITY, STATE, ZIP:	Cairo, GA 39828
PHONE:	229-377-2125
FAX:	229-377-1855
WEBSITE:	www.sailfishboats.com
BOAT DETAILS	
BOAT MODEL	241CC
LENGTH	24'
BEAM	8' 6"
APPROX WET WEIGHT	5400 lbs
MAXIMUM HP	300 Hp
FUEL CAPACITY	110 Gal
ENGINE DETAILS	
ENGINE MODEL/S	F300XCA
HORSEPOWER	300 HP
INDUCTION	EFI/VCT/DOHC
DISPLACEMENT	4.2 L
WEIGHT	562 lbs
GEAR RATIO	1.75:1
ENGINE MOUNTING HEIGHT	
MOUNTING HOLE POSITION	#3
PROPELLER/S	
SERIES	SALTWATER SERIES II / SDS HUB
DIAMETER/PITCH	15 1/2 x 15
YAMAHA PART # (sgl)	6CE-45978-00-00
PROPELLER MATERIAL	POLISHED STAINLESS STEEL
COMMENTS	
BOAT EQUIPPED WITH TWO BATTERIES, T-TOP, FULL TANK OF FUEL, THREE PERSONS, MISC. SAFETY AND TEST GEAR (APPROX 180 LBS)	

**Notice to Consumer:** The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Seminole Marine Inc. reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice.

FISHING FOCUSED. FAMILY FRIENDLY.™


Seminole Marine Group | sailfishboats.com



## Sailfish 241 CC - Performance Bulletin

**Motor:** Single Mercury Verado 250 L6

PERFORMANCE			
RPM	MPH	GPH	MPG
1000	1.60	1.00	1.60
2000	3.20	2.80	1.10
3000	5.20	7.30	0.70
3500	12.60	8.60	1.50
4000	24.70	10.10	2.40
4500	28.10	13.30	2.10
5000	33.70	16.40	2.10
5500	36.20	21.50	1.70
6000	43.50	26.30	1.70
6340	46.10	27.20	1.70
ACCELERATON			
0-20MPH - 3 Sec		0-30MPH - 4.5 Sec	
TEST CONDITIONS			
NUMBER OF PEOPLE			2
AIR TEMP (Fahrenheit)			88º F
ELEVATION (IN FEET ABOVE SEA LEVEL)			253'
WIND VELOCITY			0 ~ 3 MPH

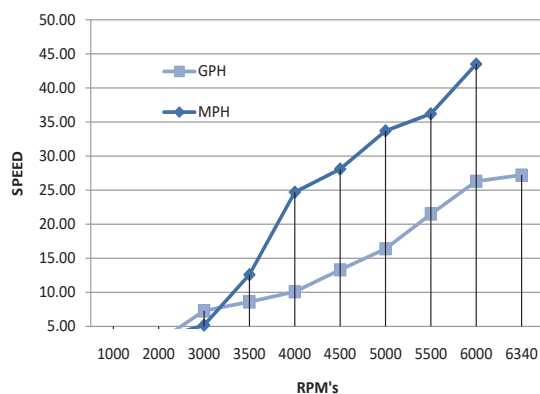

MANUFACTURER INFO	
NAME:	Sailfish Boats
STREET:	PO Box 1899
CITY, STATE, ZIP:	Cairo, GA 39828
PHONE:	229-377-2125
FAX:	229-377-1855
WEBSITE:	www.sailfishboats.com
BOAT DETAILS	
BOAT MODEL	241CC
LENGTH	24'
BEAM	8' 6"
APROX WET WEIGHT	5400 lbs
MAXIMUM HP	300 Hp
FUEL CAPACITY	110 Gal
ENGINE DETAILS	
ENGINE MODEL/S	Verado 250 L6
HORSEPOWER	250 HP
INDUCTION	EFI
DISPLACEMENT	2.6 L
WEIGHT	635 lbs
GEAR RATIO	1.85
ENGINE MOUNTING HEIGHT	
MOUNTING HOLE POSITION	#3
PROPELLER/S	
SERIES	Revolution 4
DIAMETER/PITCH	14 5/8 x 17
MERCURY PART # (sgl)	48-857024A46
PROPELLER MATERIAL	POLISHED STAINLESS STEEL
COMMENTS	
BOAT EQUIPPED WITH T-TOP, 10 GAL. OF FUEL, TWO PERSONS, MISC. SAFETY AND TEST GEAR (APPROX 180 LBS)	

**Notice to Consumer:** The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Seminole Marine Inc. reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice.

FISHING FOCUSED. FAMILY FRIENDLY.™


Seminole Marine Group | sailfishboats.com



## Sailfish 241 CC - Performance Bulletin

### Motors: Single Mercury Verado 300 L6

PERFORMANCE			
RPM	MPH	GPH	MPG
1000	0.30	1.10	0.30
2000	2.40	3.10	0.80
3000	8.10	7.90	1.00
3500	22.10	10.40	2.10
4000	26.70	11.00	2.40
4500	29.00	17.70	1.60
5000	33.40	22.30	1.50
5500	38.30	28.90	1.30
6000	49.30	29.60	1.70
6240	50.70	29.80	1.70
ACCELERATON			
0-20MPH - 3 Sec		0-30MPH - 4 Sec	
TEST CONDITIONS			
NUMBER OF PEOPLE			2
AIR TEMP (Fahrenheit)			88º F
ELEVATION (IN FEET ABOVE SEA LEVEL)			253'
WIND VELOCITY			0 ~ 3 MPH

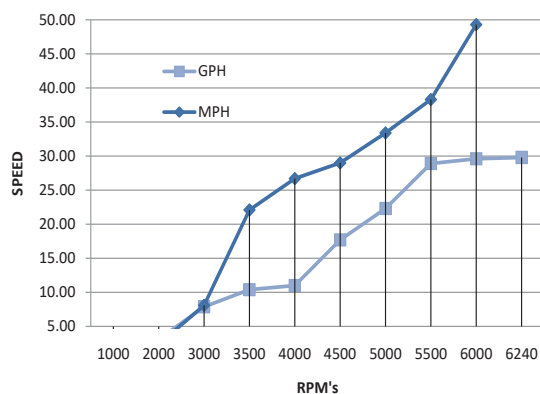

MANUFACTURER INFO	
NAME:	Sailfish Boats
STREET:	PO Box 1899
CITY, STATE, ZIP:	Cairo, GA 39828
PHONE:	229-377-2125
FAX:	229-377-1855
WEBSITE:	www.sailfishboats.com
BOAT DETAILS	
BOAT MODEL	241CC
LENGTH	24'
BEAM	8' 6"
APROX WET WEIGHT	5400lbs
MAXIMUM HP	300 Hp
FUEL CAPACITY	110 Gal
ENGINE DETAILS	
ENGINE MODEL/S	Verado 300 L6
HORSEPOWER	300 HP
INDUCTION	EFI
DISPLACEMENT	2.6 L
WEIGHT	635 lbs
GEAR RATIO	1.85
ENGINE MOUNTING HEIGHT	
MOUNTING HOLE POSITION	#3
PROPELLER/S	
SERIES	Revolution 4
DIAMETER/PITCH	14 5/8 x 19
MERCURY PART # (sgl)	48-857026A46
PROPELLER MATERIAL	POLISHED STAINLESS STEEL
COMMENTS	
BOAT EQUIPPED WITH T-TOP, 7 GAL. OF FUEL, TWO PERSONS, MISC. SAFETY AND TEST GEAR (APPROX 180 LBS)	

**Notice to Consumer:** The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Seminole Marine Inc. reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice.

FISHING FOCUSED. FAMILY FRIENDLY.™

Seminole Marine Group | sailfishboats.com